



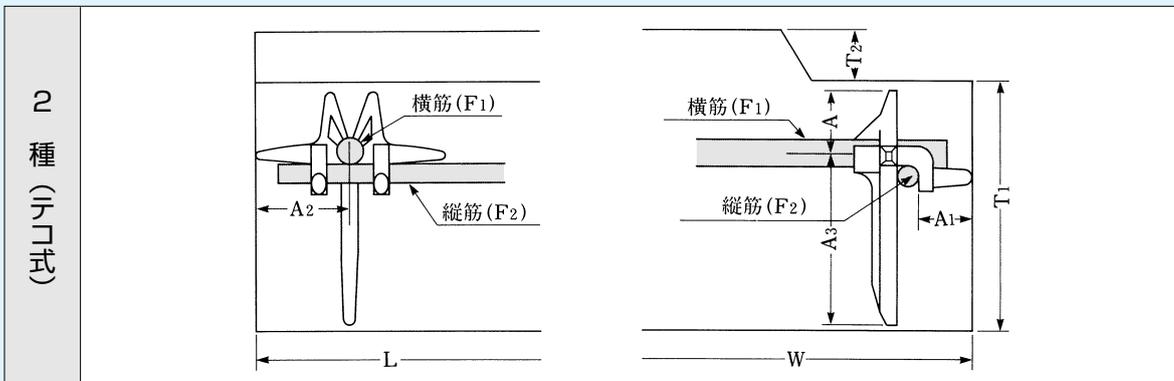

上ぶた式U形側溝ふた用スペーサ

JIS A5372:2004

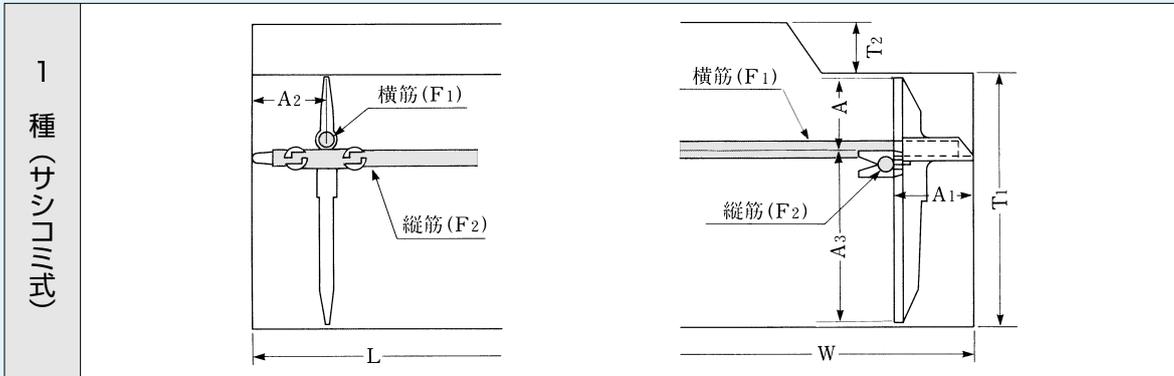

呼び名の
見方

OP30-3-4-30-11
 ↑ ↑ ↑ ↑ ↑
 T F₁ F₂ A₁ A

呼び名の
見方

NC80-10-6-30-30-18
 ↑ ↑ ↑ ↑ ↑
 T F₁ F₂ A₁ A₂ A

(mm)

コードNo.	U形側溝ふた					スペーサ仕様								
	種類	呼び名	T ₁	横筋 φ	縦筋 φ	呼び名	カブリ				F ₁	F ₂	全長 A+A ₃	1箱入数 (個)
						T - F ₁ - F ₂ - A ₁ - A	A	A ₁	A ₂	A ₃				
013062	1 種	150	30	2.6	2.6	OP30-3-4-30-11	11	30	25	17	3.2	4	28	12,300
013063		180	35	2.6	2.6	OP35-3-4-30-11	11	30	25	22	3.2	4	33	10,000
013064		240	40	3.2	3.2	OP40-3-4-30-11	11	30	25	27	3.2	4	38	10,400
013031		300	50	4.0	3.2	OP50-4-4-30-15	15	30	25	33	4	4	48	9,450
013032		360	55	5.0	3.2	OP55-5-4-30-15	15	30	25	38	5	4	53	8,300
013022		450	60	D6	4.0	OP60-6-4-30-20	20	30	25	38	6.8	4	58	7,500
013023		600	65	D6	4.0	OP65-6-4-30-20	20	30	25	43	6.8	4	63	7,050
014127	2 種	150	80	D6	D6	RS80-6-6-25-18	18	25	25	60	6.5	6.0	78	4,550
		180	80											
034135		240	85	D10		NC85-10-6-30-30-18	18	30	30	65	10.0	6.5	83	2,750
		300												
034163		450	100	D10		NC100-10-6-30-30-23	23	30	30	75	10.0	6.5	98	2,400
034169		600	130											

入数を変更する場合があります。