



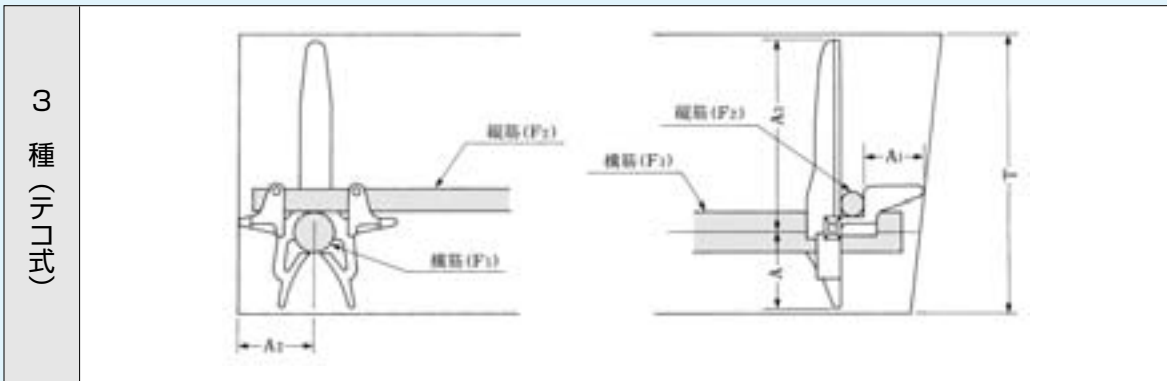

# 落ちふた式U形側溝ふた用スペーサ

JIS A5372:2004

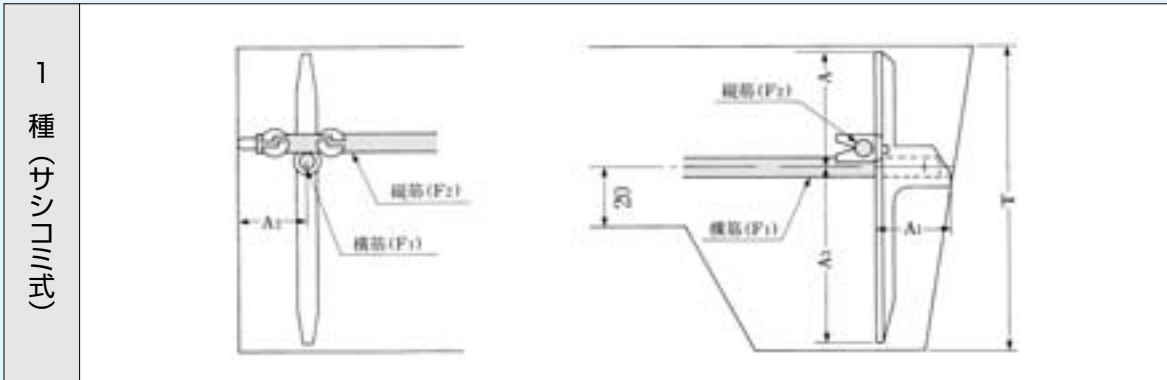

呼び名  
の見方 NC95-10-6-30-30-23  
↑ T ↑ F1 ↑ F2 ↑ A1 ↑ A2 ↑ A

呼び名  
の見方 KS85-6-4-28-13  
↑ T-5 ↑ F1 ↑ F2 ↑ A1 ↑ A

## 縦打用

(mm)

コードNo.	側溝ふた					スペーサ仕様								
	種類	呼び名	T	横筋φ	縦筋φ	呼び名	カブリ				F1	F2	全長 A+A3	1箱入数 (個)
						T-A1-A2	A	A1	A2	A3				
015008	1 種	250	90	4	4	AP 90-30-28	35	30	28	53	4	4	88	4,500
015009		300	95	4	4	AP 95-30-28	35	30	28	58	4	4	93	4,300
015010		400	110	4	4	AP110-30-28	45	30	28	63	4	4	108	3,700
015011		500	125	4	4	AP125-30-28	55	30	28	68	4	4	123	3,100
014429	3 種	250	90	D 6	4	KS 90-6-4-28-18	18	28	30	70	6.8	4	88	3,500
034162		300	95	D10	D 6	NC 95-10-6-30-30-23	23	30	30	70	10	6.8	93	2,550
034165		400	110	D10	D 6	NC110-10-6-30-30-23	23	30	30	85	10	6.8	108	2,300
034168		500	125	D10	D 6	NC125-10-6-30-30-23	23	30	30	100	10	6.8	123	1,900

## 平打用 (防音ゴム対応品)

(mm)

014409	3 種	250	90	D 6	4	KS 85-6-4-28-13	13	28	30	70	6.8	4	83	3,600
034110		300	95	D10	D 6	NC 85-10-6-30-30-13	13	30	30	70	10	6.8	83	2,750
034113		400	110	D10	D 6	NC100-10-6-30-30-13	13	30	30	85	10	6.8	98	2,400
034116		500	125	D10	D 6	NC115-10-6-30-30-13	13	30	30	100	10	6.8	113	2,100

入数を変更する場合があります。